

nRFLR1110 LoRaWAN Module

LoRa@ Wireless Module-Powered by Semtech

Datasheet

V1.1



Content

1 Introduction.....	1
1.1 Feature.....	1
2 Description.....	3
2.1 System Diagram.....	4
2.2 Pin Definition.....	5
2.3 Pinout.....	6
3 Electrical Characteristics.....	10
3.1 Maximum Ratings.....	10
3.2 Normal Working Conditions.....	10
3.3 Module Specifications.....	10
4 Application Information.....	12
4.1 Package Information.....	12
4.2 Land Pattern.....	12
4.3 Package Marking.....	13
4.4 Reference Design Based on nRFLR1110 Module.....	14
5 Ordering Information.....	15
6 Related Documents and Resources.....	15
7 Revision History.....	15

1 Introduction

The nRFLR1110 is a fusion of Semtech LR1110 and Nordic nRF52840 low-power, remote iot module. LoRa® technology with Semtech is used for long-range wireless communications, GNSS, Wi-Fi and Bluetooth location tracking service.

1.1 Feature

- LoRaWAN 1.0.3 specification compliant
- Multi-Purpose Radio Front-End Targeting Geolocation Purposes: GNSS (GPS/ BeiDou)、Wi-Fi、Bluetooth, suitable for indoor and outdoor positioning
- Supported bands: EU868,US915
- LoRaWAN Activation by OTAA/ABP
- LoRa Point-to-Point (P2P) communication
- Easy-to-use AT Command set via UART interface
- TCXO crystal for LoRa chip
- IO ports: UART, I2C, GPIO, USB
- Temperature range: -40°C to +85°C
- Supply voltage: 2.0 ~ 3.6 V
- Low-Power Wireless Systems with 7.8 kHz to 500 kHz bandwidth
- Ultra-Low Power Consumption 6 uA in sleep mode
- LoRa PA Boost mode with 22 dBm output power

- Serial Wire Debug (SWD) interface
- Module size: 20 mm x 20 mm x 3.5mm
- CE,FCC Certified

2 Description

The nRFLR1110 module integrates the high-performance Semtech LR1110 and Nordic nRF52840, offering developers low-power, long-range LoRaWAN® communication with global frequency band coverage. This makes it highly versatile for a wide range of low-power wide-area IoT applications, such as smart agriculture, wireless meter reading, and smart city programs.

Additionally, the nRFLR1110 module can leverage GNSS (Global Navigation Satellite System) for outdoor tracking applications. Moreover, Wi-Fi passive scanning and Bluetooth mesh serve as suitable IPS (Indoor Positioning System) solutions, providing comprehensive location coverage while reducing complexity and cost. It is an ideal development platform for applications such as asset tracking, inventory management, loss prevention, and anti-theft.

2.1 System Diagram

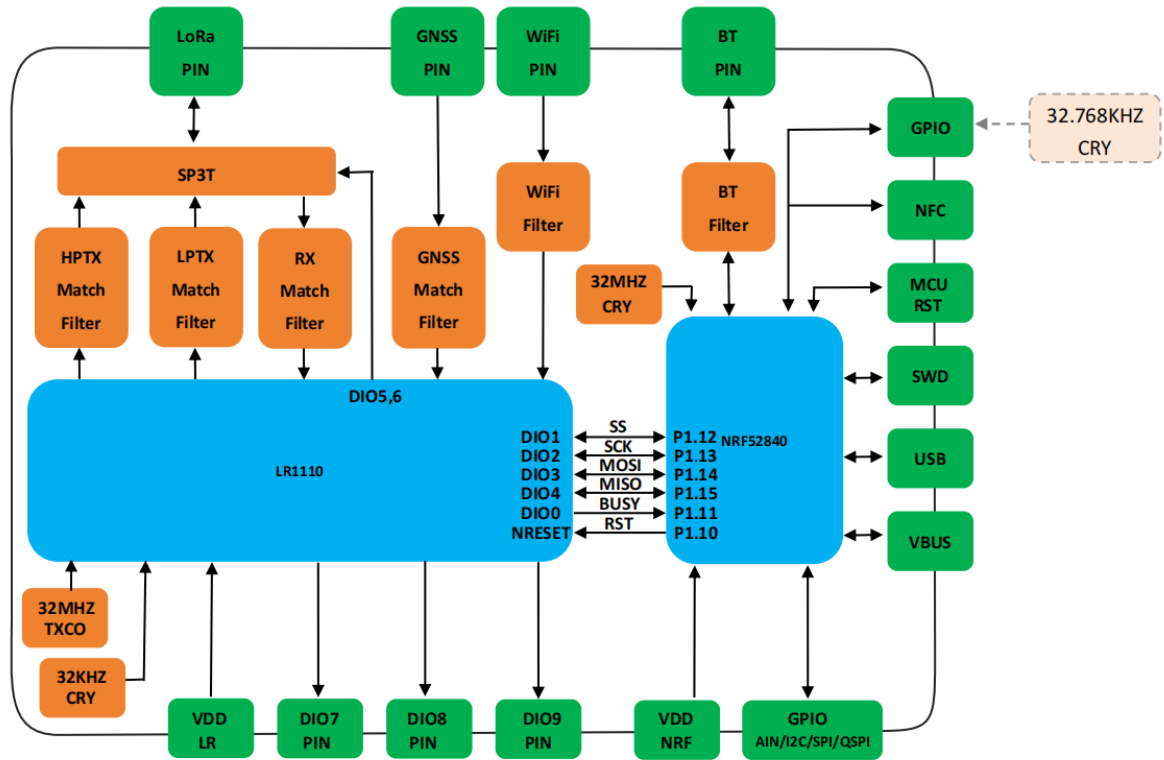


Figure 1:nRFLR1110 Schematic diagram

▲ NOTE

When using the BLE (Bluetooth Low Energy) function of the NRF52840 or designing products where the NRF52840 needs to enter the low-power mode, the two pins P0.00/XL1 and P0.01/XL2 need to be connected to the circuit of a 32.768KHZ crystal oscillator.

2.2 Pin Definition

nRFLR1110-Pin Definition

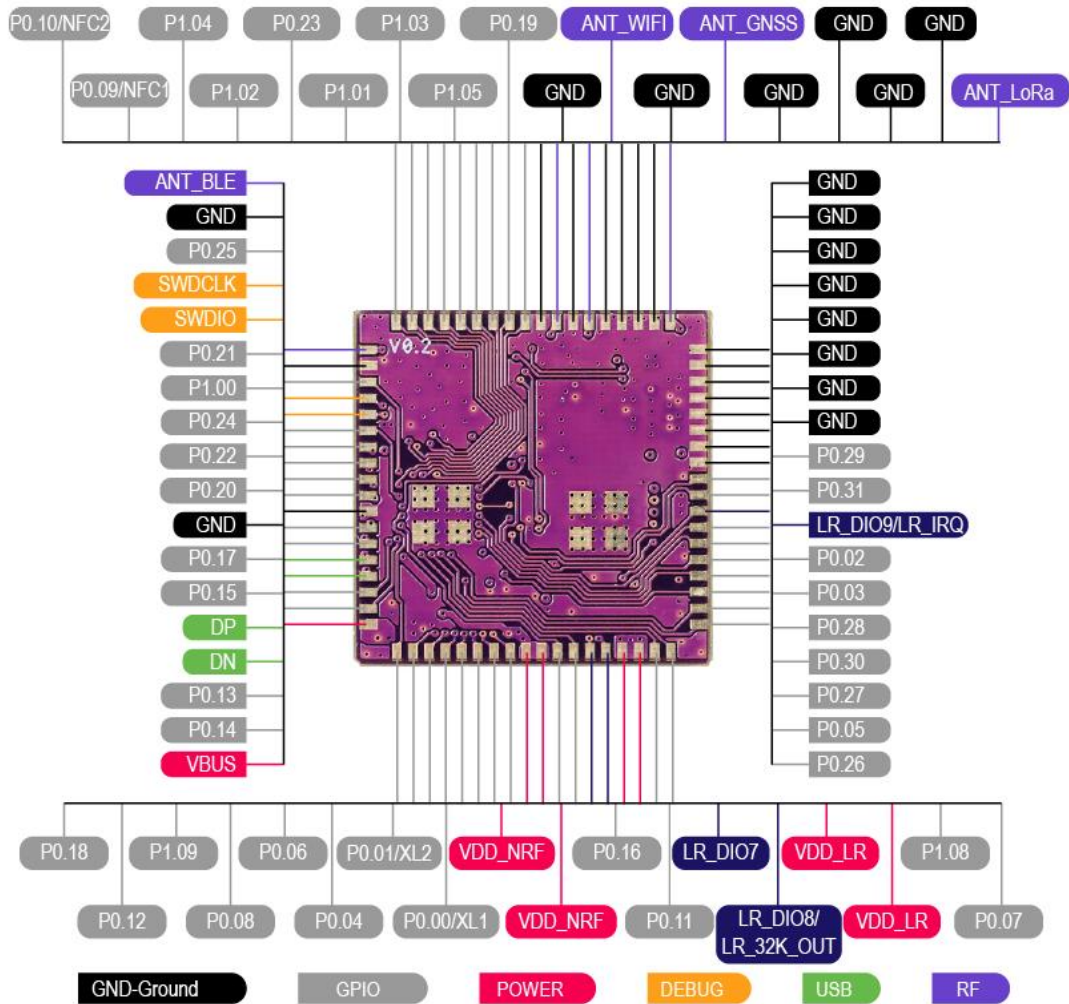


Figure 2:nRFLR1110 Pin Definition

2.3 Pinout

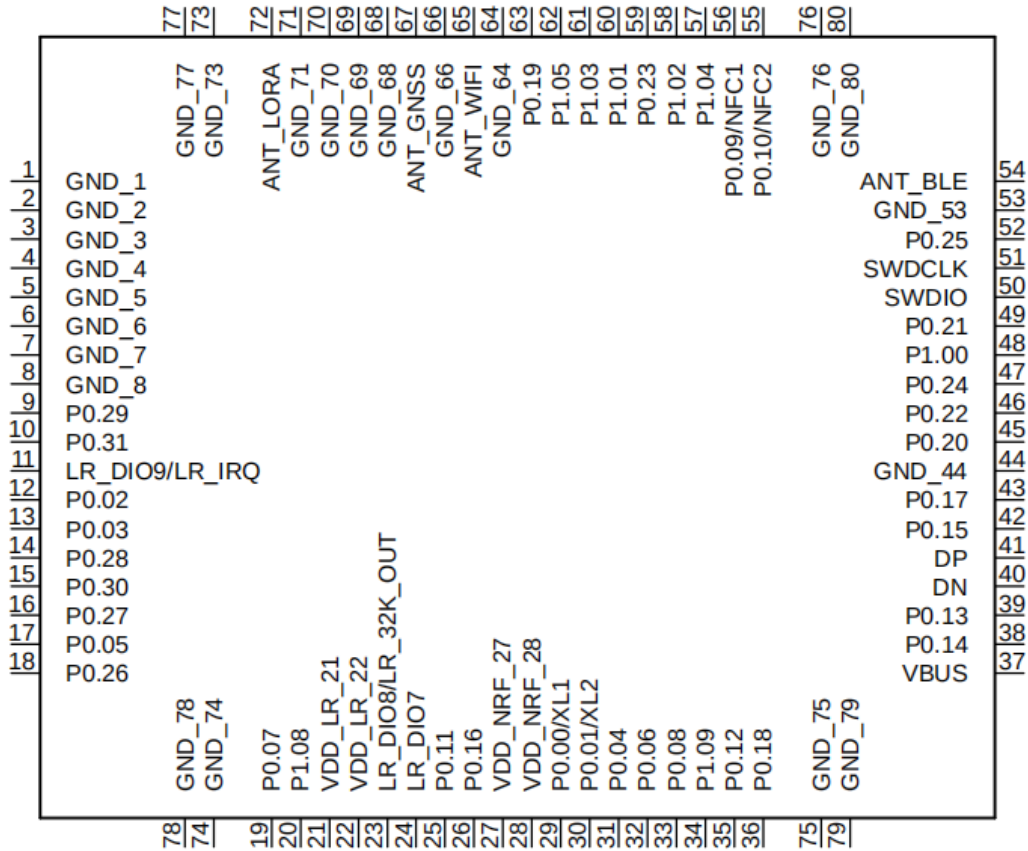


Figure 3:nRFLR1110 Pin arrangement

Table 1:nRFLR1110 Pinout

Number	Name	Type	Description
1	GND	-	Ground
2	GND	-	Ground
3	GND	-	Ground
4	GND	-	Ground
5	GND	-	Ground
6	GND	-	Ground
7	GND	-	Ground
8	GND	-	Ground
9	P0.29	I/O	MCU GPIO P0.29
10	P0.31	I/O	MCU GPIO P0.31
11	LR_DIO9/LR_IRQ	I/O	LR1110 DIO9//LR_IRQ

12	P0.02	I/O	MCU GPIO P0.02
13	P0.03	I/O	MCU GPIO P0.03
14	P0.28	I/O	MCU GPIO P0.28
15	P0.30	I/O	MCU GPIO P0.30
16	P0.27	I/O	MCU GPIO P0.27
17	P0.05	I/O	MCU GPIO P0.05
18	P0.26	I/O	MCU GPIO P0.26
19	P0.07	I/O	MCU GPIO P0.07
20	P1.08	I/O	MCU GPIO P1.08
21	VDD_LR	P	Supply voltage for LoRa®
22	VDD_LR	P	Supply voltage for LoRa®
23	LR_DIO8/LR_32K_OUT	I/O	LR1110 DIO8/LR_32K_OUT
24	LR_DIO7	I/O	LR1110 DIO7
25	P0.11	I/O	MCU GPIO P0.11
26	P0.16	I/O	MCU GPIO P0.16
27	VDD_NRF	-	Supply voltage for Bluetooth
28	VDD_NRF	-	Supply voltage for Bluetooth
29	P0.00/XL1	I/O	MCU GPIO P0.00/XL1(32.768KHZ CRY)
30	P0.01/XL2	I/O	MCU GPIO P0.01/XL2(32.768KHZ CRY)
31	P0.04	I/O	MCU GPIO P0.04
32	P0.06	I/O	MCU GPIO P0.06
33	P0.08	I/O	MCU GPIO P0.08
34	P1.09	I/O	MCU GPIO P1.09
35	P0.12	I/O	MCU GPIO P0.12
36	P0.18	I/O	MCU GPIO P0.18
37	VBUS	I/O	MCU GPIO VBUS
38	P0.14	I/O	MCU GPIO P0.14
39	P0.13	I/O	MCU GPIO P0.13
40	DN	I/O	MCU USB DN

41	DP	I/O	MCU USB DP
42	P0.15	I/O	MCU GPIO P0.15
43	P0.17	I/O	MCU GPIO P0.17
44	GND	-	Ground
45	P0.20	I/O	MCU GPIO P0.20
46	P0.22	I/O	MCU GPIO P0.22
47	P0.24	I/O	MCU GPIO P0.24
48	P1.00	I/O	MCU GPIO P1.00
49	P0.21	I/O	MCU GPIO P0.21
50	SWDIO	I/O	MCU SWDIO
51	SWDCLK	I	MCU SWDCLK
52	P0.25	I/O	MCU GPIO P0.25
53	GND	-	Ground
54	ANT_BLE	RFIO	Bluetooth Antenna
55	P0.10/NFC2	I/O	MCU GPIO P0.10/NFC2
56	P0.09/NFC1	I/O	MCU GPIO P0.09/NFC1
57	P1.04	I/O	MCU GPIO P1.04
58	P1.02	I/O	MCU GPIO P1.02
59	P0.23	I/O	MCU GPIO P0.23
60	P1.01	I/O	MCU GPIO P1.01
61	P1.03	I/O	MCU GPIO P1.03
62	P1.05	I/O	MCU GPIO P1.05
63	P0.19	I/O	MCU GPIO P0.19
64	GND	-	Ground
65	ANT_WIFI	RFIO	WIFI SCAN Antenna
66	GND	-	Ground
67	ANT_GNSS	RFIO	GNSS Antenna
68	GND	-	Ground
69	GND	-	Ground
70	GND	-	Ground

71	GND	-	Ground
72	ANT_LoRa®	RFIO	LoRa® Antenna
73	GND	-	Ground
74	GND	-	Ground
75	GND	-	Ground
76	GND	-	Ground
77	GND	-	Ground
78	GND	-	Ground
79	GND	-	Ground
80	GND	-	Ground

3 Electrical Characteristics

3.1 Maximum Ratings

Table 2: Absolute Maximum Ratings

Item	Description	Min	Max	Unit
VDD_LR	LoRa® supply voltage	-0.5	+3.9	V
VDD_NRF	MCU supply voltage	-0.3	+3.9	V
VBUS	MCU USB VBUS	-0.3	+5.8	V

3.2 Normal Working Conditions

Table 3: Recommended Operating Conditions

Item	Description	Min	Max	Unit
VDD_LR	LoRa® supply voltage	+1.8	+3.7	V
VDD_NRF	MCU supply voltage	+1.7	+3.6	V
VBUS	MCU USB VBUS	+4.35	+5.5	V
TA	Ambient temperature	-40	+85	°C

3.3 Module Specifications

Table 4: nRFLR1110 features

ITEMs	Parameter	Specifications	Unit
Structure	Size	20(W) X 20(L) X 3.5(H)	mm
	Package	80 pin Module	
Electrical Characteristics	Power supply	3.3V typical	V
	Sleep current	6uA	uA
	Operation current (Transmitter+MCU)	126mA @ LoRa® TX 22dBm	mA
	Operation current (Receiver+MCU)	18mA @ LoRa® SF12 125 kHz	mA
		8mA @ Bluetooth Scan	
	8mA @ Wi-Fi Scan		

	Output power	20dBm max @LoRa®			dBm	
		6dBm max @ Bluetooth			dBm	
	Sensitivity	SF			dBm	
			min	type		max
		SF7	-	-125		-
SF12	-	-141	-			
Peripheral Interface	Full-speed 12 Mbps USB					
	QSPI/SPI/TWI/I ² S/PDM/QDEC					
	High speed 32 MHz SPI					
	Quad SPI interface 32 MHz					
	Manual reset pin input					

4 Application Information

4.1 Package Information

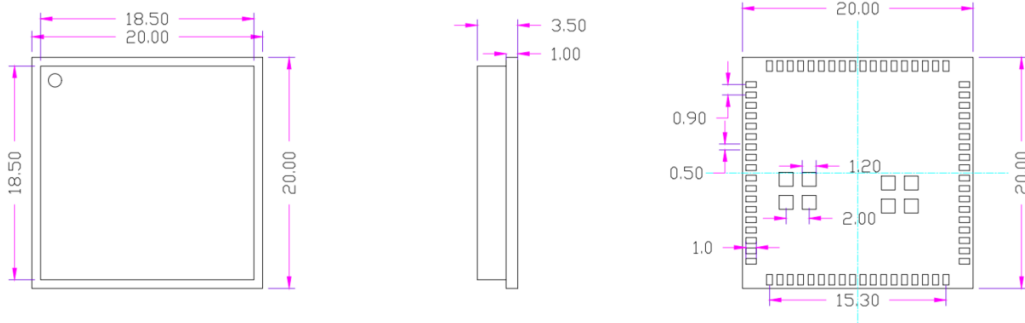


Figure 4:Package Outline Drawing (Unit:mm)

4.2 Land Pattern

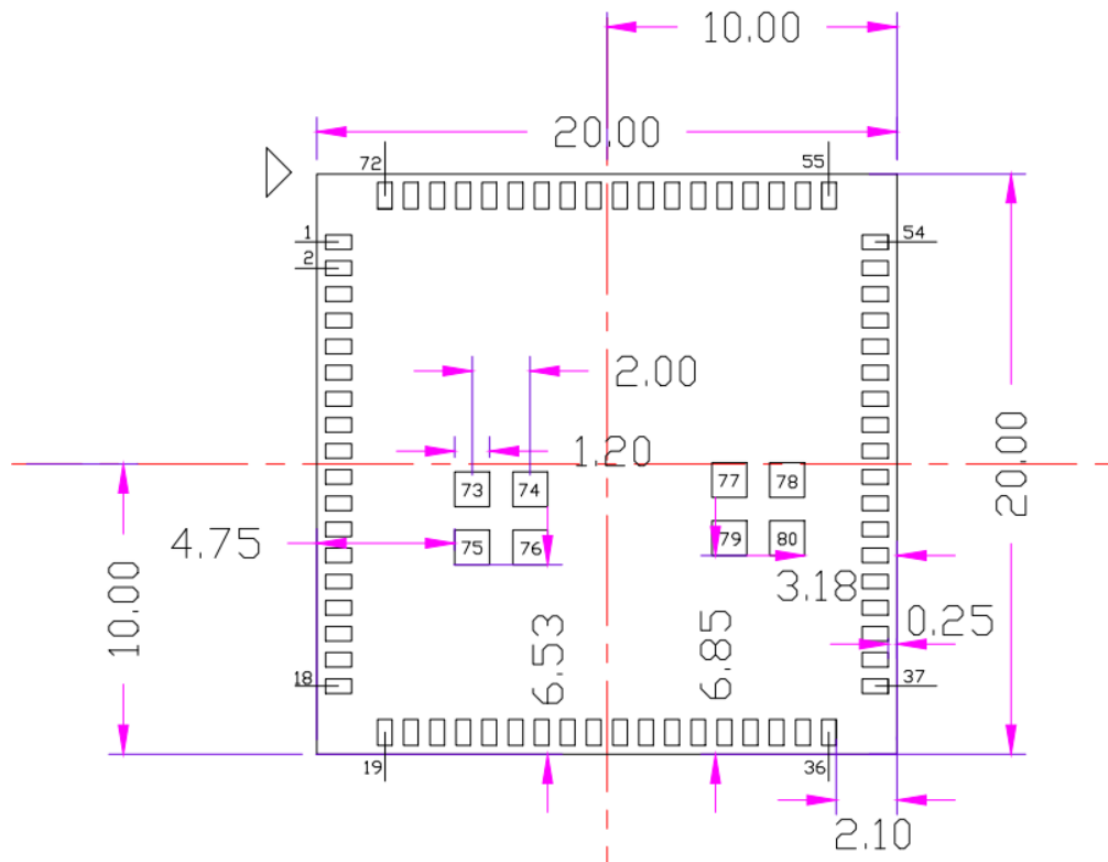


Figure 5:PCB Layout (Unit:mm)

4.3 Package Marking



4.4 Reference Design Based on nRFLR1110 Module

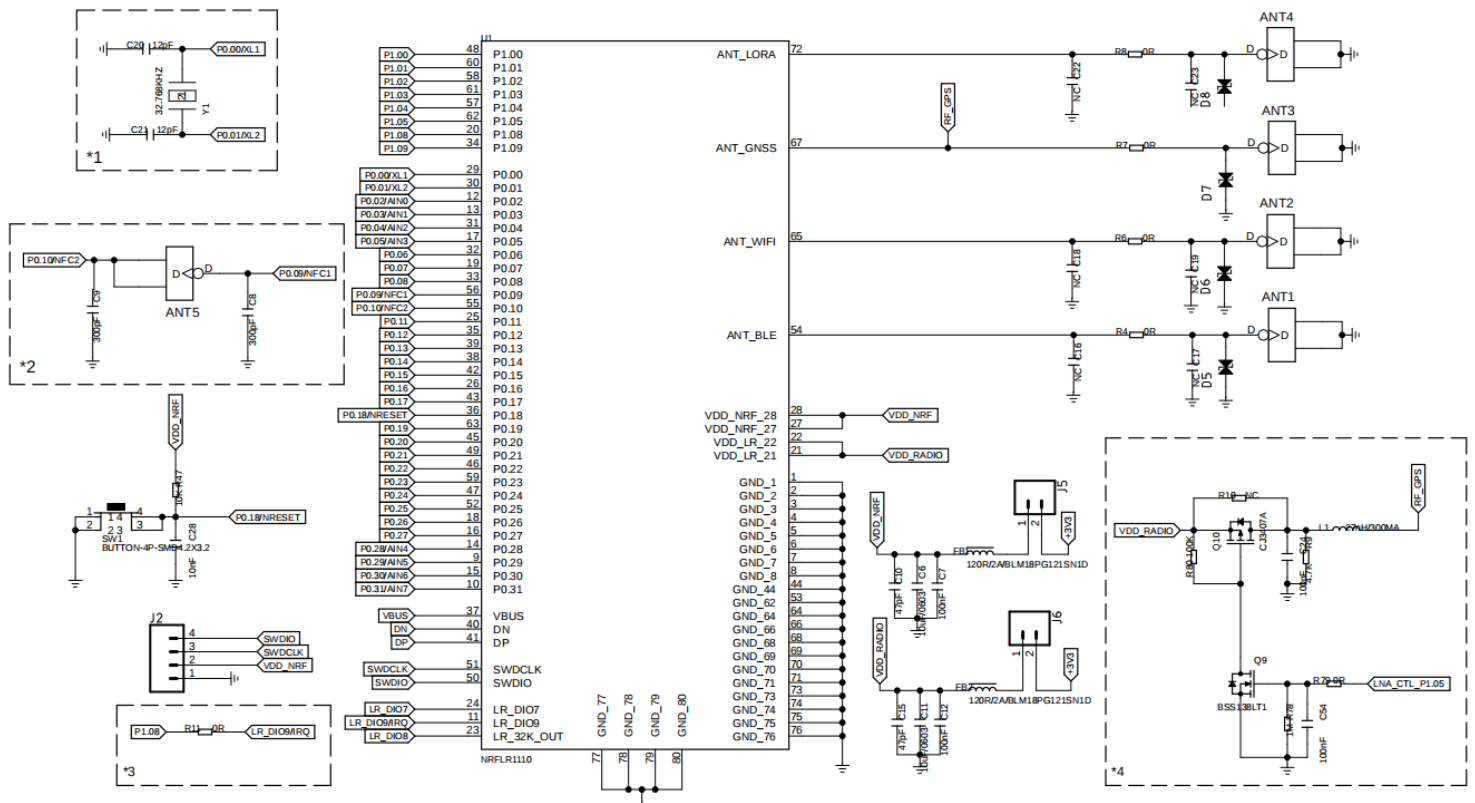


Figure 6: Reference design based on nRFLR1110

Notes:

- 1 When using the BLE Bluetooth function of nRF52840 or designing low-power consumption products, this crystal oscillator circuit must be incorporated.
- 2 When the NFC function of nRF52840 is required, this matching circuit must be added.
- 3 When using the LoRa function for nRFLR1110/nRFLR1121, the LR_DIO9/IRQ pin must be externally connected to the GPIO pin of nRF52840.
- 4 For the GPS antenna design of nRFLR1110, this GPS active antenna power control circuit must be included. The nRFLR1110 module's GPS only supports connecting to active antennas.

5 Ordering Information

Technical Support: techsupport@elecrow.com

Sales: info@elecrow.com

6 Related Documents and Resources

➤ [nRFLR1110 Product Link](#)

7 Revision History

Date	Version	Release Notes
2025/3/3	V1.0	Initial release
2025/5/15	V1.1	Update the pin functions of the module.